OPUS 59" ACRYLIC OVAL TUB

Cat. No. ATOVN59MF





L: 58-5/8" W: 31-1/2" H: 23"

Water depth: 16-5/8" to top of tub Water depth: 12-1/8" to overflow

The following is recommended for ATOVN59MF tubs:


•Faucets: part **#7901 or 7913**•Leg tub drain: part **#5599LT**



Overflow can be drilled. With overflow drilled this tub requires drain 5599PD or 5599HD. Tubs that have been drilled with overflow are "special order" and are not returnable.

Gallon Capacity without OF: 50
Gallon Capacity with OF: 41
Shipping Weight: 133 lbs.
Empty Weight: 73 lbs.
Filled Weight without OF: 493 lbs.
Filled Weight with OF: 417lbs.






(Air jet configuration if system is added, more info on page 2.)

Features:

- ► Interior and exterior walls acrylic sheets
- ► Air between sheets provides insulation to help retain warmth
- ► No faucet holes
- No overflow
- ► IAPMO certified
- ► Tub is thoroughly inspected before shipment
- ▶ Option to add foam insulation between tub walls available
- ► New: Air jet system now available, more info on page 2



Custom Colors Available (inside of tub is always white enamel):
Painted bathtubs are considered "special order" and are not returnable
\$160 Bisque or Black \$250 Designer Color

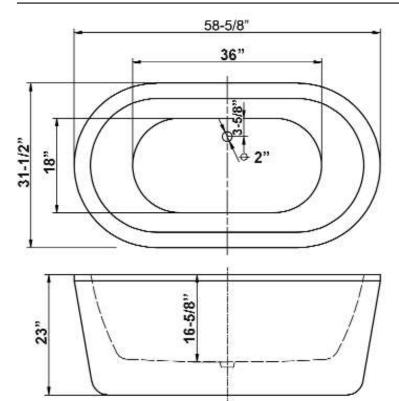

Dimensions of fixture are nominal and specifications subject to change without notice.

Cat. No. AIR KIT 1, AIR KIT 2

Oval bathtub





- A AIR JET Bottom air jets for maximum bubble action.
- B BLOWER The heart of the massage system.
- C MANIFOLD Double back flow security prevention device.
- D FLEXIBLE PVC HOSING IAPMO certified.
- MAIN AIR INTAKE HOSE High temperature and pressure resistant.

Air Kit is installed in tub before shipment

Features:

- ► 750 Watt blower motor operates system
- ▶ 300 Watt air heater warms air
- ► System powered by 120V
- ▶ 16 brass air jets placed in bottom of tub
- ► Each air jet has 24 holes
- ► Air jet caps available in white (AIR KIT 1) or black (AIR KIT 2)
- ► Includes 1¼" x 3' main air hose plus 1¼" x 9' extension hose
- ► Automatic system purge after each use
- ► Automatic safety timer turns off system after 20 minutes
- ► Includes water tight remote control
- ➤ Compatible with most acrylic, copper and resin tubs with no feet
- ▶ Not available with cast iron tubs or tubs with feet

INSIDE TUB VIEW - WILL VARY BY TUB DESIGN





