



Submitted Model No.:

Specific Features:

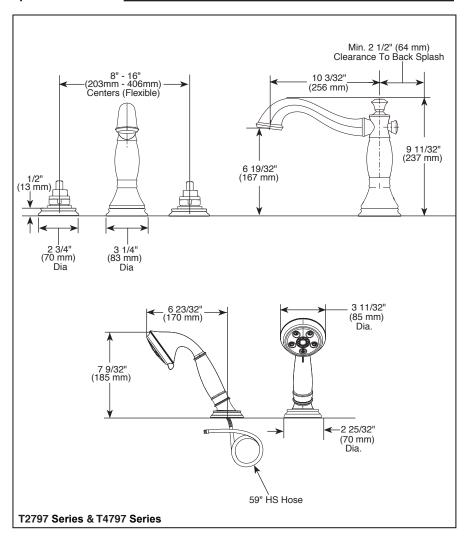

Available LHP Handle Options



Designate proper finish suffix



see what Delta can do

ROMAN TUB/WHIRLPOOL **FAUCET TRIM**

- Cassidy[™] Series
- Three Hole Installation (T2797 Series)
- Four Hole Installation (T4797 Series)
- Rough-In Kit Must Also be Ordered to Complete Installation (R4707 for four hole and R2707 for three hole)

STANDARD SPECIFICATIONS:

- Trim Only for two handle Roman Tub faucet for concealed mounting
- Temperature and volume controlled with handles
- Rough-In kit must also be ordered to complete installation (R4707 for four hole and R2707 for three hole). There are separate specification sheets on each rough-in kit if more details are required.
- Three-setting H₂OkineticTM handshower H₂OkineticTM spray, massage spray and pause
- Handshower includes double check valves for backflow prevention (T4797 Series)
- LHP Less Handle Program. See handle options below
- Handshower flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or for commercial users, for 5 years from the date
- 5 year limited warranty on electronic parts (other than batteries); or for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLETE VALVE COMPLIES WITH:

ASME A112.18.1 / CSA B125.1

Indicates compliance to ICC/ANSI A117.1 - Valve control only

■ EPA WaterSense® - Applies to handshower only - 59433*